

MODEL

- VT-500

BASIC FEATURES

- Stainless-steel fabrication: frame, drum, control box, etc.
- Reinforced drum wedged stainless-steel ring
- Direct drive system on a stainless-steel shaft by the rear of the drum (no chains or no belts are used)
- Standard back drain for easy cleaning
- Stainless-steel helical paddle is used for perfect massaging
- Unloading by reverse rotation with front controls
- Continuous vacuum massaging
- Water separator
- Stainless steel legs (4 adjustable)
- Water separator for pump protection
- Easy cleaning
- Crate
- CSA Certification




OPTIONAL FEATURES

- Vacuum loading
 - Back sanitation door
 - Load cells kit (stainless steel) and legs
 - Front loading door support
 - Front loading door support and discharge chute
 - Front remote controls
 - Other voltages available
 - Heated control box for microprocessor
 - Service kit for standard maintenance
- All features are subject to change without notice.*

MODEL VT-500

CAPACITY	500 lbs. (227 kg)		
MACHINE DIMENSIONS	Depth	A	92.31" (2,345 mm)
	Height	B	55.625" (1,413 mm)
	Width	C	37.19" (944 mm)
POWER SUPPLY	120 V / 1 pH / 60 Hz		
PUMP CAPACITY (STD)	20 m ³ 0.9 kW		
MICROPROCESSOR	MC-40		

MACHINE DIMENSIONS

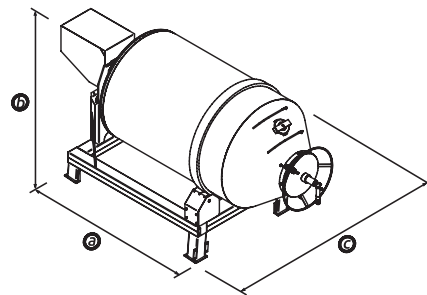

CONTROL PANEL

