



# VACUUM DOUBLE CHAMBER

## MODELS

• 420A • 600A • 620A • 650A

## BASIC FEATURES

- Double chamber
- Stainless steel construction
- Twin seal element – Double seam band
- Vacuum sensor - Vacuum level controlled in percentage, directly with Microprocessor
- Filler plates
- Wheels (stainless steel)
- Rear panel
- Crate
- Certification: ETL listed C & US (CSA & UL)

## MODEL 420A

SEAL BARS	Length	A	19.1" (485 mm)
	Qty		4
	Distance between	B	18" (457 mm)
CHAMBER DIMENSIONS	Height		8" (203 mm)
BUSCH PUMP	Std.		40 m <sup>3</sup> 2.0 HP
	Width	E	55.75" (1,416 mm)
MACHINE DIMENSIONS	Depth	F	31" (787 mm)
	Height	G	43" (1,092 mm)
	POWER SUPPLY		208-220 V / 3 pH / 60 Hz
MICROPROCESSOR			MC-40

## OPTIONAL FEATURES

- Electric cut-off - Two wire seal system: outside wire cuts off excessive part of bag
- Bi-active seal - Sealing from top and bottom for thick pouches and aluminum bags (except model 420A)
- Modified atmosphere packaging (MAP) - Increases the product's shelf life, provides extra protection, prevents colouring
- Air regulator – Regulates air pressure in the seal bars bladders with compressed air (not included)
- Adjustable venting system - Controlled decompression of the vacuum chamber
- 12" (305 mm) chamber lid (except model 420A)
- Vacuum pump sizes
- Stainless steel tilted insert for liquid products
- Silencer
- Other voltages available
- Heated control box for microprocessor
- Service kit for standard maintenance

*All features are subject to change without notice.*



# VACUUM DOUBLE CHAMBER


## MODELS 600A, 620A AND 650A

		600A	620A	650A
SEAL BARS	Length A	26" (660 mm)	26" (660 mm)	33.5" (855 mm)
	Qty	4	4	4
	Distance between B	22.5" (572 mm)	28" (711 mm)	31" (787 mm)
CHAMBER DIMENSIONS	Height	8" (203 mm)	8" (203 mm)	8" (203 mm)
BUSCH PUMP	Std.	100 m <sup>3</sup> 5.0 HP	100 m <sup>3</sup> 5.0 HP	165 m <sup>3</sup> 7.5 HP
MACHINE DIMENSIONS	Width E	68" (1,727 mm)	68" (1,727 mm)	85" (2,159 mm)
	Depth F	36" (914 mm)	39.5" (1,003 mm)	49" (1,245 mm)
	Height G	47" (1,194 mm)	47" (1,194 mm)	47" (1,194 mm)
POWER SUPPLY		208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz
MICROPROCESSOR		MC-40	MC-40	MC-40



## MACHINE DIMENSIONS

2 SEAL BARS / CHAMBER

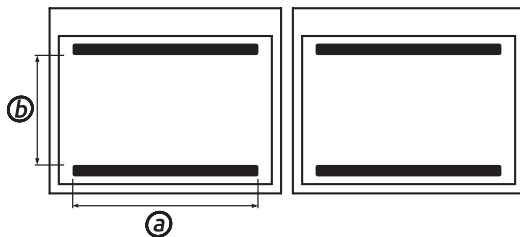

## CONTROL PANEL

MC-40

