



# VACUUM SINGLE CHAMBER

## MODELS

- 400   • 450A   • 450T
- 550A   • 560A   • 580A

## BASIC FEATURES

- Single chamber
- Stainless steel construction
- Twin seal element – Double seam band
- Vacuum sensor - Vacuum level controlled in percentage, directly with Microprocessor (except model 400)
- Filler plates
- Cover latch
- Wheels (stainless steel)
- Rear panel
- Crate
- Certification: ETL listed C & US (CSA & UL) (except model 400)

## OPTIONAL FEATURES

- Electric cut-off - Two wire seal system: outside wire cuts off excessive part of bag
- Bi-active seal - Sealing from top and bottom for thick pouches and aluminum bags on models 550A, 560A and 580A
- Modified atmosphere packaging (MAP) - Increases the product's shelf life, provides extra protection, prevents colouring (except model 400)
- Air regulator – Regulates air pressure in the seal bars bladders with compressed air (not included) (except model 400)
- Adjustable venting system - Controlled decompression of the vacuum chamber
- 12" (305 mm) chamber lid on models 550A, 560A and 580A
- Vacuum pump sizes
- Stainless steel tilted insert for liquid products
- Silencer
- Other voltages available
- Heated control box for microprocessor
- Service kit for standard maintenance

*All features are subject to change without notice.*

## MODELS 400, 450A AND 450T

		400	450A	450T
SEAL BARS	Length	A 19.1" (485 mm)	19.1" (485 mm)	19.1" (485 mm)
	Qty	2	2	2
	Distance between	B 23" (584 mm)	23" (584 mm)	22" (559 mm)
CHAMBER DIMENSIONS	Height	9.5" (241 mm)	9.5" (241 mm)	8" (203 mm)
BUSCH PUMP	Std.	40 m <sup>3</sup> 2.0 HP	40 m <sup>3</sup> 2.0 HP	20 m <sup>3</sup> 0.9 kW
MACHINE DIMENSIONS	Width	E 30.5" (775 mm)	30.5" (775 mm)	30.5" (775 mm)
	Depth	F 32" (813 mm)	32" (813 mm)	28" (711 mm)
	Height	G 44" (1,118 mm)	44" (1,118 mm)	21" (533 mm)
POWER SUPPLY		208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	120 V / 1 pH / 60 Hz
MICROPROCESSOR		MC-05	MC-40	MC-40




# VACUUM SINGLE CHAMBER

## MODELS 550A, 560A AND 580A

			550A	560A	580A
SEAL BARS	Length	A	26" (660 mm)	26" (660 mm)	33.5" (855 mm)
	Qty		2	2	2
	Distance between	B	23.25" (591 mm)	31" (787 mm)	36.75" (933 mm)
CHAMBER DIMENSIONS	Height		8" (203 mm)	8" (203 mm)	8" (203 mm)
BUSCH PUMP	Std.		63 m <sup>3</sup> 3.0 HP	100 m <sup>3</sup> / 5,0 HP	165 m <sup>3</sup> 7.5 HP
MACHINE DIMENSIONS	Width	E	31" (787 mm)	38" (965 mm)	45.25" (1,153 mm)
	Depth	F	36" (914 mm)	36" (914 mm)	46.5" (1,183 mm)
	Height	G	47" (1,194 mm)	47" (1,194 mm)	43.75" (1,113 mm)
POWER SUPPLY			208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz
MICROPROCESSOR			MC-40	MC-40	MC-40



## MACHINE DIMENSIONS

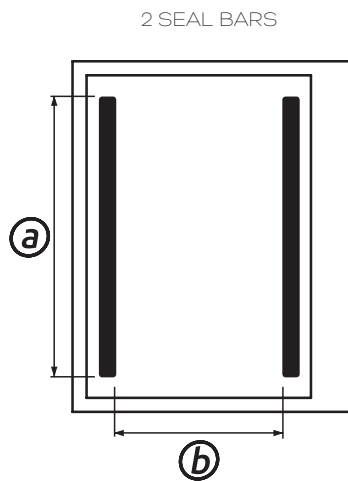

## CONTROL PANELS

MC-05



MC-40

