

## Model T – Industrial, Revolving Tray Oven

### Standard features

- Direct fired
- Gas burners
- Digital controls
- Aluminized steel (interior walls/roof)
- Stainless steel exterior facade Galvanised steel exterior panelling (sides, back)
- Front access doors for driving system gas and electrical components
- Counter balanced doors made of heavy gauge aluminum
- Double stabilisation system for models : T-6-48, T-8-64, T-10-80
- Full steel or perforated metal shelves

### Options

- Exhaust canopy (motor extractor not included)
- Self generating steam system (Built-in)
- Stainless steel steam injectors to use a separated steam boiler
- Baking stone shelves

### Models:


- T-6-36
- T-6-42
- T-6-48
- T-8-48
- T-8-56
- T-8-64
- T-10-60
- T-10-70
- T-10-80

### Installation

An authorized technician from Picard will take care of the unloading and installation at the customer's site. All electrical, gas, water, and chimney hook-ups, along with the oven burner's start-up, are at the customer's expense and have to be done by the qualified installation technician and according to local codes.



## Model T – Industrial, Revolving Tray Oven

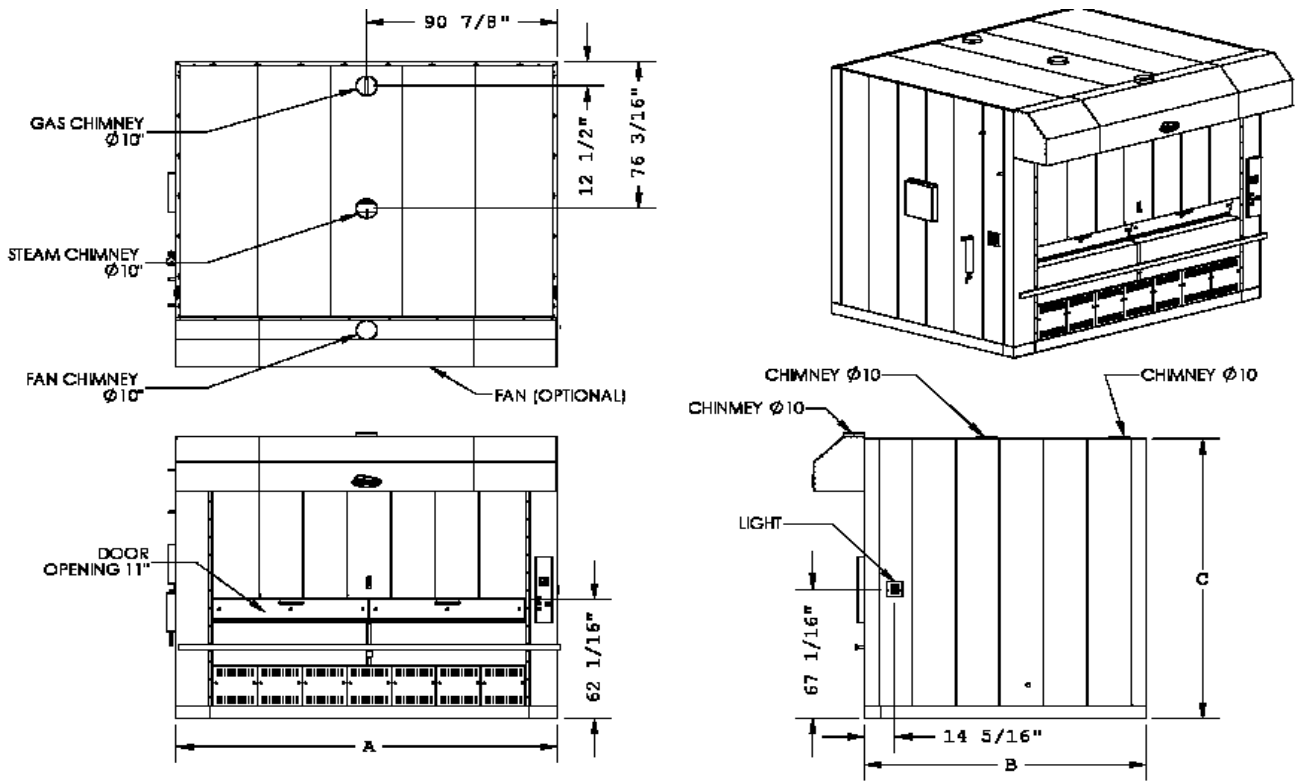

Model	Baking tray capacity 18" x 26"	Shelf dimension	Oven width	Oven depth	Oven height Direct fired	Oven height Indirect fired	Oven door net height	Chimney flue diameter	Hood exhaust pipe size	Baking chamber venting diameter	B.T.U.
			A	B	C	C					
T-6-36	36	26½" x 111½"	142½"	104"	95 11/16"	109 3/8"	10"	10"	10"	10"	400 000
T-6-42	42	26½" x 129½"	163 7/8"	104"	95 11/16"	109 3/8"	10"	10"	10"	10"	420 000
T-6-48	48	26½" x 147½"	181¾"	104"	95 11/16"	109 3/8"	10"	10"	10"	10"	480 000
T-6-48	48	26½" x 111½"	142½"	121¼"	113"	126¾"	10"	10"	10"	10"	2 x 240 000
T-8-56	56	26½" x 129½"	163 7/8"	121¼"	113"	126¾"	10"	10"	10"	10"	560 000
T-8-64	64	26½" x 147½"	181¾"	121¼"	113"	126¾"	10"	10"	10"	10"	2 x 320 000
T-10-60	60	26½" x 111½"	142½"	134 3/16"	131 5/16"	145¼"	10"	10"	10"	10"	600 000
T-10-70	70	26½" x 129½"	163 7/8"	134 3/16"	131 5/16"	145¼"	10"	10"	10"	10"	700 000
T-10-80	80	26½" x 147½"	181¾"	134 3/16"	131 5/16"	145¼"	10"	10"	10"	10"	2 x 400 000